



This drawing is a part of the proprietary and/or confidential information of ASC Corporation. It is intended for use only for the specific project for which it was prepared. It is not to be distributed, copied, or used for any other project without the prior written permission of ASC Corporation.

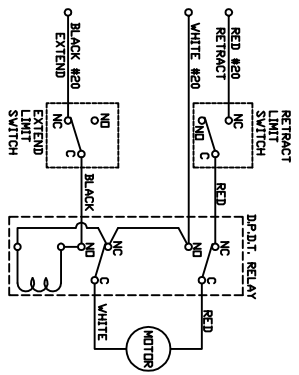

ELECTRICAL SCHEMATIC
SHOWN IN RETRACT POSITION

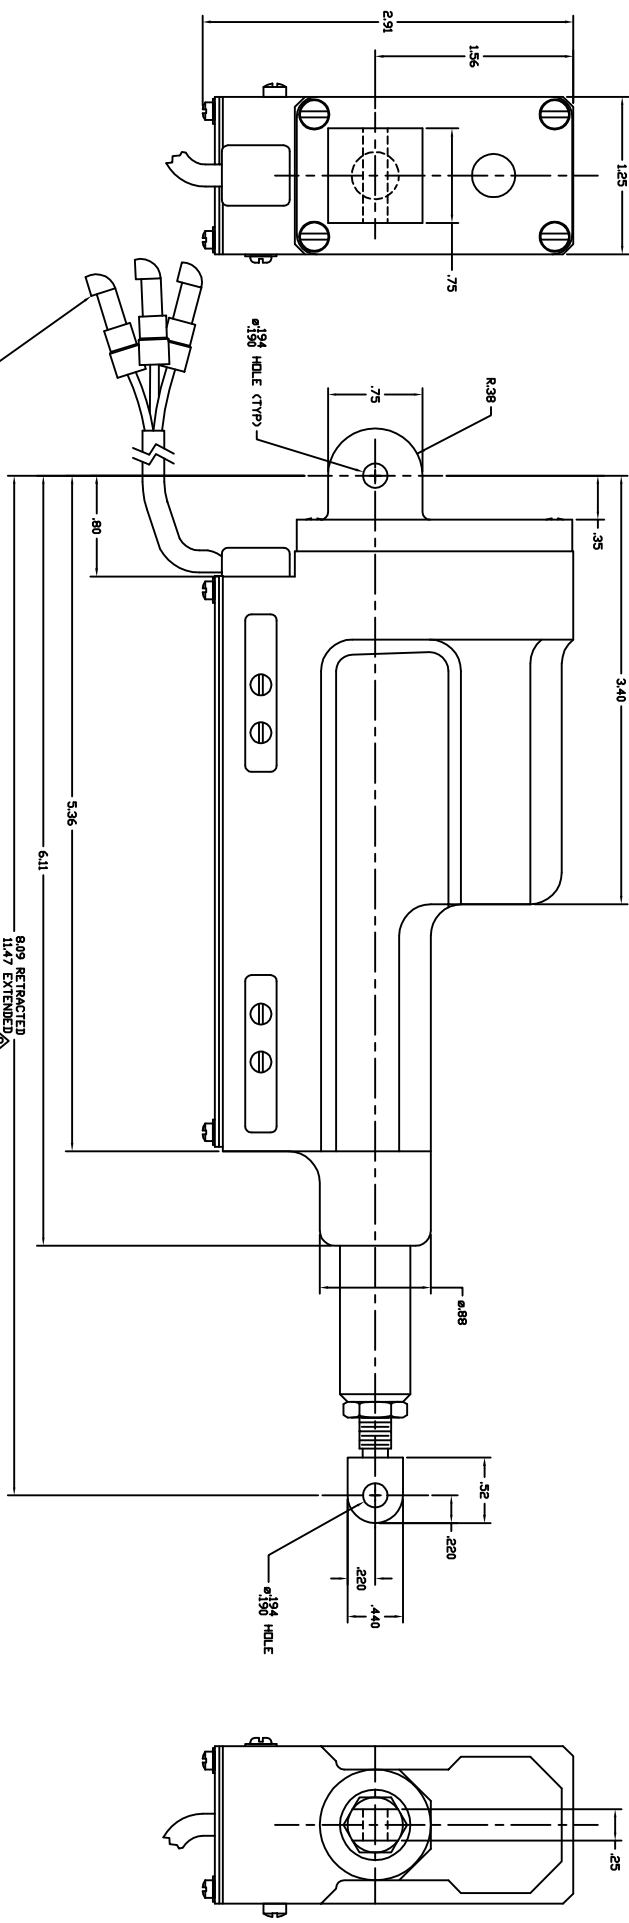

20 GA. STRANDED 100 MIN. TEFLON INSULATED WITH 32446 KNIFE DISCONNECTS 50 MIN. GLASS SLEEVING

NOTES CONT'D:

- 7. ALL WIRE SHALL BE STRANDED & PER MIL-W-5086
- 8. NOMINAL VOLTAGE 24 TO 28 V.D.C.
- 9. ADJUSTMENT AT EYE BOLT IS 4.40
- 10. OPERATING SPEED FOR ONE EXTEND-RETRACT CYCLE AT 27.5 VDC AND 50 LB LOAD IS 38 SECONDS MIN TO 50 SECONDS MAX.
- 11. SAME AS 2007-0001 EXCEPT BRNVE SLEEVE HAS VELDED KEY, AND HOUSING IS SLOTTED TO WHITE.

REV	DATE	APP'D	DESCRIPTION
1	8-11-99	D.S.	REVISED
2	9-19-02	D.S.	REVISED
3	6-17-03	D.S.	REVISED
4	9-24-03	D.S.	REVISED

REV	DATE	APP'D	DESCRIPTION
1	8-11-99	D.S.	REVISED
2	9-19-02	D.S.	REVISED
3	6-17-03	D.S.	REVISED
4	9-24-03	D.S.	REVISED

REV	DATE	APP'D	DESCRIPTION
1	8-11-99	D.S.	REVISED
2	9-19-02	D.S.	REVISED
3	6-17-03	D.S.	REVISED
4	9-24-03	D.S.	REVISED

REV	DATE	APP'D	DESCRIPTION
1	8-11-99	D.S.	REVISED
2	9-19-02	D.S.	REVISED
3	6-17-03	D.S.	REVISED
4	9-24-03	D.S.	REVISED

REV	DATE	APP'D	DESCRIPTION
1	8-11-99	D.S.	REVISED
2	9-19-02	D.S.	REVISED
3	6-17-03	D.S.	REVISED
4	9-24-03	D.S.	REVISED