


		_	
ASC2917	ASC1333	C.O. NO. REV	
В	>	20	
REORIENT (-3) VIEW WITH DRAIN PORT DOWN	REDRAWN TO CAD. DIM. CHANGES: SHT. (1) - IS .46 WAS .55; IS 2.69 WAS 2.80. SHT. (2) - IS 5.77 WAS 6.30; IS 4.45 WAS .80. SHT. (3) - IS 5.85 WAS 6.00; IS 92.90 WAS 93.00; IS 2.60 WAS 2.80.	REVISION DESCRIPTION	THE PROPERTY OF
9-14-04 D.S.	8-23-99	DATE	
D.S.	D.S.	APPD.	

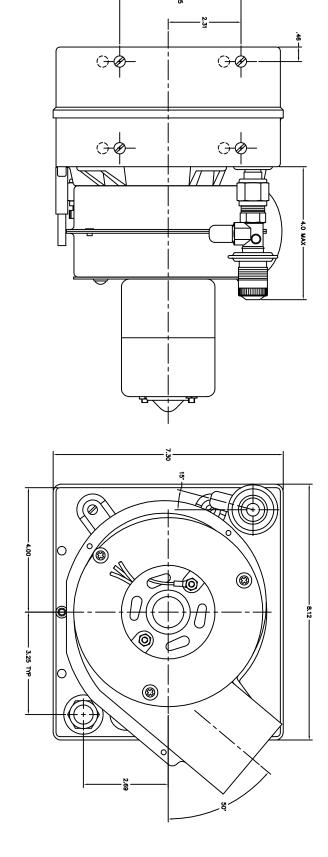

NOTES CONTINUED:

7. HOUSING MATERIAL TO BE HIGH IMPACT, FIRE RETARDENT, NON CORROSIVE AND LIGHTWEIGHT ABS.

SAME AS OTHER CONFIGURATIONS EXCEPT AS SHOWN

-1 CONFIGURATION

- 9. UNIT PROVIDES 6000 B.T.U.H. WITH AIR ENTERING THE COIL AT 150 C.F.M. AT 80° D.B. AND 67° W.B. 8. EXPANSION VALVE MUST BE SECURELY ATTACHED TO ENSURE PROPER OPERATION.
- 10. 10-32 FLOATING NUTPLATES PROVIDED FOR MOUNTING.
 11. UNIT USES R-12 REFRIGERANT AND IS LEAK CHECKED PRIOR TO SHIPMENT.
- 13. EXPANSION VALVE SET AT 40 P.S.I.G. 12. UNIT WEIGHS 8.25 LBS.
- 14. WIRING: WHITE-GROUND ORANGE-HIGH RED-LOW
- 15. LOW: SPEED CURRENT 4.5 MAXIMUM HIGH: SPEED CURRENT 6.5 MAXIMUM
- 16. LOW: SPEED (REF.) 3500 ±500 HIGH: SPEED (REF.) 5000 ±500

			_								-	
9	•	9	110	9€	•	= +	١.)	Į		3	
럟	MEASTAN STRUCTURES & STRUCTURES & STRUCTURES & STRUCTURE PRODUCTION FOR PRODUCTIO						ı	TTEM SIZE				
鰻	i	ı	₹	THE PURSUE	DICENTRACET	E	Į	4			Ħ	
SEE OF		THE WASTEN		9	13	- <u>1</u>) FLATHESS & STRAID-THESS	T STREET		PART NUMBER	
8	ċ	3	4 14	¥ĕ	Pε	1	뙲	¥	Ę			-
DO NOT SCALE DRAVING	COST DISC IN PARK	THREADS	ERML RAID ARS TO ALS	AD EDGES THO HAY.	-STD-10	A40 (1087	100 = 1/16 AIGES	TOLERANCES ON	S DIHERVIXE SPECIFIED		DESCRIPTION	
			2	酒	498	8	¥	×			П	
		2700	Ē	₽	1	ľ	ı	æ	캶	ā	L	Ш
		E PLATON		A				B. CLARK	STEMPLES	LIST OF HATERUALS	MATERIA	
								1-3-80	MTE		ľ	
SCALE 1:1 INDIT ALS	CHEET THE STEET THE STEE		AC ACTS TO LICER MED		E 427 C	פעאם	THE .	٧	ACRI CRIA		HATL SPEC	
П			EVAPORATOR MODULE				CHITA, KAN	CINTROLS CORPORATION		FINISH FINISH SPEC		
4					רי	"					SPEC	

